Thomas & Betts Cable Ties and Accessories

T & B Cable Ties — Military Specification Quality

We only stock top-quality Thomas & Betts nylon cable ties with a Stainless Steel Locking Tab. They conform to government specification MS3367 (Part No.'s. 4332 and 4333 also conform to MIL-S-23190E). Available in natural (white) or ultraviolet-resistant black. Use black for longer life in outdoor exposure applications.


Standard T & B Cable Ties (without mounting hole)

	Committee	CHILLING HOME		HELLION ?	11111111)) :	· · ·
onath v	Minimum	Maximum	Color				

Length x Width Inches	Minimum Unlocking Strength	Maximum Bundle Diameter	Color (White or Black)	Package Quantity	Part No.	Price
5.0 x 0.12	18 lbs.	1.25 inch	White	100	4331-100-White	\$6.99
5.0 x 0.12	18 lbs.	1.25 inch	Black	100 1000	4331-100-Black 4331-1000-Black	\$11.99 \$107.99
7.0 x 0.19	50 lbs.	1.75 inch	White	100 1000	4332-100-White 4332-1000-White	\$8.99 \$80.99
7.0 x 0.19	50 lbs.	1.75 inch	Black	100 1000	4332-100-Black 4332-1000-Black	\$11.99 \$107.99
15.5 x 0.19 *	50 lbs.	4.00 inch	White	10 100 1000	4333-10-White 4333-100-White 4333-1000-White	\$2.99 \$26.99 \$254.99
15.5 x 0.19 *	50 lbs.	4.00 inch	Black	10 100 1000	4333-10-Black 4333-100-Black 4333-1000-Black	\$3.59 \$31.49 \$299.99
30.0 x 0.30	120 lbs.	9.00 inch	White	10 50	4334-10-White 4334-50-White	\$9.99 \$44.99
30.0 x 0.30	120 lbs.	9.00 inch	Black	10 50	4334-10-Black 4334-50-Black	\$14.99 \$67.99

This size is suitable for securing Roll Bar Padding.

T & B Mounting Type Cable Ties (with hole for #10 screw)

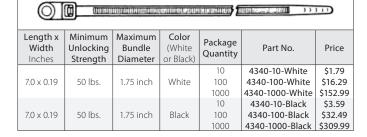

Cable Tie Installation Tools





Installing cable ties with the proper tool makes any wiring job faster and more uniform. These easy-to-use tools pull each cable tie to a repeatable tension for professional results. The tool then cuts the tail off flush with the head to minimize the sharp edge that is left by other methods

Plastic tool automatically cuts the tail when a pre-set tension is reached. Works on 0.09" to 0.19" wide cable ties (our part numbers 4331 through 4333 and 4340).

Beta Tools 1743 Cable Tie Installation Tool......Part No. BT-017430001\$61.19 Steel tool lets you pull as much tension as you want before cutting the tail. Works on cable ties up to 0.35" wide, including all of the cable ties we carry.

Nylon Cable Tie Mounting Base





Attach to any surface with a screw or rivet. Feed a standard cable tie through the ears on the mount and around the item to be secured. Fits cable ties up to 0.19" width. The mounting hole is 0.150" diameter for a 6-32 screw or \(\frac{1}{8} \)" rivet. Natural (off-white) color only.

Nylon Cable Tie Mounts, package of 10......Part No. 4360-10 pk \$3.49 **Nylon Cable Tie Mounts**, package of 100 **Part No. 4360-100 pk** \$27.99

Aluminum Cable Tie Mounting Base



Low-profile metal mount attaches to any surface with a screw or rivet. Feed a standard cable tie through the slot on the mount and around the item to be secured. Fits cable ties up to 0.30" width. The mounting hole is 0.195" diameter for a 10-32 screw or a $\frac{3}{16}$ " rivet.

Aluminum Cable Tie Mount, each	Part No. 4335-1 39¢
Aluminum Cable Tie Mounts, package of 10	Part No. 4335-10 \$3.29
Aluminum Cable Tie Mounts, package of 100	Part No. 4335-100 \$27.29

MIL-T-43435B Nylon Lacing Cord




Lacing Cord is used in aircraft and military applications as well as in F1 cars for the assembly of wiring looms and harnesses. Flat braided nylon tape is lighter than cable ties, does not significantly increase the diameter of the harness, and the cut ends won't cut you! Coated with a fungicidal wax to hold knots. Minimum breaking strength is 50 pounds. Temperature range -67°F to 250°F

(-55°C to 121°C). 500 yard (457 meter) spool. Choose natural off-white or black color. MIL-T-43435B Nylon Lacing Cord, Natural (off-white) ... Part No. 4041-Natural \$24.99


Spiral Wrap and Split Braided Sleeve

Spiral Wrap



Not just for wires, use Spiral Wrap and Split Braided Sleeve to protect hoses too!

Self-Wrapping Split Braided Sleeve



Polyethylene material wraps on like tape. The elastic memory of the material holds wires and hoses in neat, tight bundles and protects them from abrasion. Great for protecting Aeroquip lines from chafing. Available in black as well as translucent white. The black material has better UV resistance for continuous outdoor exposure.

$\frac{1}{4}$ inch diameter for $\frac{3}{16}$ to 1 inch bundles:

Translucent White, per foot	
Black, per foot	
$\frac{1}{2}$ inch diameter for $\frac{3}{8}$ to 3 inch bundle	
Translucent White, per foot Translucent White, per 100 foot spool	
Plack perfect	Part No. 4017 Plk Et 90¢

This unique laterally split, semi-rigid braided sleeving is as easy to install as common corrugated loom, but provides much better cut and abrasion resistance and a more professional appearance. It is lighter weight, more flexible and does not trap moisture inside. It is also highly resistant to petroleum based fluids and is unaffected by exposure to UV light. Rated for continuous operation from -75°C to 125°C (-103°F to 257°F). The nominal diameter shown below allows for a 25% overlap.

1/8 inch dia. Split Braided Sleeve, per foot	. Part No. 4011-Ft 59¢	
1/8 inch dia. Split Braided Sleeve, per 100 foot spool	. Part No. 4011-Spool \$44.49	
½ inch dia. Split Braided Sleeve, per foot		
$\frac{1}{2}$ inch dia. Split Braided Sleeve, per foot		
³ / ₄ inch dia. Split Braided Sleeve, per foot		
1.00 inch dia. Split Braided Sleeve, per foot		