

Plumbing Fittings

Fittings are manufactured by the following: Aeroquip, Canton, Earls, Goodridge, Tilton, and various others.

Barbed Inlet Fitting for Remote Master Cylinder



This special aluminum fitting is made specifically for use on Girling and Lockheed remote master cylinders with 7/16"-20 inlet port. Use this adapter when rubber brake fluid hose is used for the inlet line from the reservoir instead of Aeroquip hose. Use a stat-o-seal, crush washer or fiber washer for sealing on the port face. This fitting has a 7/16"-20 male thread and barbed end for 5/16" I.D. hose.

Note: Normal fuel hose is not compatible with brake fluid!

Straight Inlet Adapter, Aluminum Part No. 3207 \$15.49
5/16" I.D. Brake Fluid Hose, per foot Part No. 3575 . \$2.99 per foot

Banjo Style Inlet for Remote Master Cylinder



This special fitting is similar to the one above, but the banjo style makes it easier to fit when space is tight. The banjo bolt and sealing washers are included. Has a 7/16"-20 banjo bolt and a barbed banjo fitting for 5/16" I.D. hose.

Note: Normal fuel hose is not compatible with brake fluid!

Banjo Style Master Cylinder Inlet Adapter Part No. 3219 \$48.99
5/16" I.D. Brake Fluid Hose, per foot Part No. 3575 . \$2.99 per foot


Bulkhead Mount for Pressure Switch



When a pressure switch (or electric gauge sender) is mounted directly on the engine block, the heat and vibration can contribute to a premature failure. This bulkhead mount will allow placement in a more convenient location and increase reliability. The material is steel.

1/8 NPT female to 4AN male bulkhead Part No. 3208-02-04S . \$7.99

Aluminum Fuel Distribution Blocks



1/8 NPT port can be used as a gauge port or fuel sampling port.

All ports are female pipe thread.

3/8 NPT Input, two 1/4 NPT Outlets, 1/8 NPT gauge port . Part No. 3289-06-04 . \$36.29
1/2 NPT Input, two 3/8 NPT Outlets, 1/8 NPT gauge port . Part No. 3289-08-06 . \$27.49

Brass Hose Barb Fittings



Use for connections to the fuel pump and carburetor when Aeroquip hose is not being used. Use with standard worm drive or Oetiker hose clamps.

1/8 NPT Male to 5/16" I.D. Hose, Straight Part No. 3220 \$1.49
1/8 NPT Male to 5/16" I.D. Hose, 90° Elbow Part No. 3221 \$2.99
1/4 NPT Male to 3/8" I.D. Hose, 90° Elbow Part No. 3222 \$2.49


Flapper Valves (low cracking pressure check valves)



These check valves have a hinged flapper with a low tension spring to allow virtually unimpeded flow in one direction, yet positively prevents flow in the opposite direction. They are used in fuel and oil systems when a low pressure check valve is required. These high quality aluminum valves are made to Military Specifications.

Flapper Valve with 6AN Male Fittings Part No. 3606-06 . . . \$89.99
Flapper Valve with 8AN Male Fittings Part No. 3606-08 . . . \$99.99
Flapper Valve with 10AN Male Fittings Part No. 3606-10 . . \$119.99
Flapper Valve with 12AN Male Fittings Part No. 3606-12 . . \$229.99

3AN to 42° Inverted Flare Adapter with Frame Tab

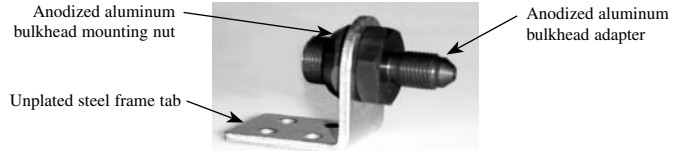

This anodized aluminum bulkhead adapter is great for making the transition from steel hard line to a 3AN brake hose. It has a female 42° inverted flare 3/8"-24 port for connecting standard 3/16" diameter automotive steel hard line. It comes with an unplated steel bracket which can be welded, bolted or riveted to the frame. An anodized aluminum bulkhead mounting nut is also furnished.

3AN to 42° Inverted Flare Adapter with Frame Tab . . . Part No. 4651 \$12.99

3AN Tee with Female 1/8 NPT Branch



This tee is often used to connect a hydraulic brake light switch to a 3AN brake line, but can also be used to connect an oil pressure switch to a 3AN gauge line. The material is steel.

3AN Tee with female 1/8 NPT branch Part No. 3209-02-03S . \$8.59

Hydraulic Brake Light Switch



This switch provides a closure to activate brake lights. Has 1/8 NPT threads.

Hydraulic Brake Light Switch, 1/8 NPT Part No. 3601 \$11.99

Pressure Gauge Adapters



These adapters and associated fittings allow 1/8 NPT hose fittings and pressure switches to be connected to a variety of threaded ports or to combine a gauge and pressure switch at a single port.

The metric adapter kit, Part No. 1072, is pictured at left.

1/8 BSP Male and Female adapters Part No. 1073 \$21.99
Includes a 1/8"-28 BSP male to 1/8"-27 NPT female adapter and a 1/8"-27 NPT male to 1/8"-28 BSP female adapter. Use with 1/8 NPT tee & nipple.

1/8"-28 BSP Male to 1/8"-27 NPT Male Part No. AM2269 \$8.99
M10x1.0k, M12x1.5, M14x1.5 Metric Kit Part No. 1072 \$29.99
All of these metric adapters have 1/8 NPT female threads on one side.

1/8 NPT Male-Male Pipe Nipple, Aluminum Part No. 3255-02 . . . \$2.99
1/4 NPT Close Nipple, Brass Part No. 3211-Brass 99¢
1/8 NPT Female Tee, Brass Part No. 3212 \$1.99
1/4 NPT Female Tee, Brass Part No. 3213 \$3.79

O-ring Boss Adapter



See page 67 for straight -12 o-ring port to 6AN, 8AN, 10AN and 12AN adapters, Part No.'s 1280-Size, as used on Canton/Mecca oil filters.

Male O-ring Boss to Male AN Adapter, 90° Elbow.

3/8" x 14 (10AN) O-ring Boss to 10AN, Aluminum . . . Part No. 3287-10-10 . \$24.99
1 1/16" x 12 (12AN) O-ring Boss to 12AN, Aluminum . . Part No. 3287-12-12 . \$31.99

Ball Check Valve with Female 1/2 NPT Ports



This economical check valve has a higher cracking pressure than the flapper type check valves. They are most commonly used in oil systems to prevent oil drain-back or to prevent back-flow when used with an Accusump. The body is made from brass.

Check Valve, Female 1/2 NPT Ports Part No. 3605-1/2 NPT \$17.49