



Jiffy-tite™ Self-Sealing, Quick-Connect Fluid Fittings

These lightweight Jiffy-tite™ Quick-Connect fittings are designed specifically for motor racing. They provide superior seal integrity under extreme racing conditions. Made of high-quality aircraft aluminum with brass valves and stainless steel ball bearings, they are corrosion resistant for extra long life. **Fittings are available in 2000, 3000 and 5000 Series based upon the required rate of fluid flow. (See chart for results of flow tests.) Check out these features:**

- Standard fluorocarbon seals are resistant to gas, oil, water and coolant
- Available with Buna seals for alcohol & methanol or EPDM seals for nitromethane or hydraulic fluid
- Patented design – designed specifically for racing
- Lightweight – lighter than competitor's fittings
- Good-looking black & gold anodized finish
- Durable 6061-T6 aluminum bodies, brass valves and stainless steel ball bearings
- Connects by hand in seconds – ribbed collar for slip proof use
- Wide variety of interchangeable adapters
- Double shut-off valves provide increased safety
- 350°F (177°C) maximum operating temperature (with standard fluorocarbon seals)
- Compact yet with high-flow capacity
- 200 psi maximum operating pressure (not for use in brake or clutch systems)
- Excellent corrosion resistance
- Excellent wear resistance
- 100% leak tested
- Rebuildable
- 360° swivel
- Made in the U.S.A.

See our website for many more Jiffy-tite™ parts!

Fitting Type - Fluorocarbon seals unless Buna is indicated. All are valved except those shown at bottom of the table.

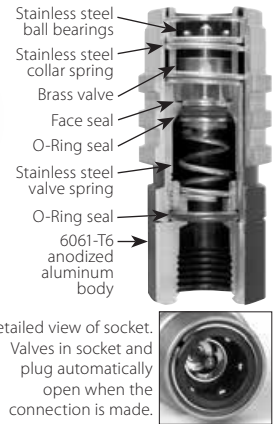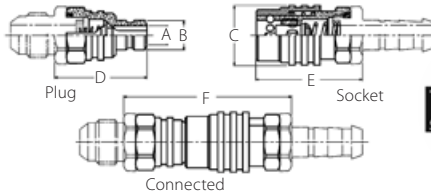

Series	A dia. inches	B dia. inches	C dia. inches	D inches	E inches	F inches	Flow ** (valved)	Flow ** (non-valved)
2000	0.24	0.37	0.75	1.68 max	1.86 max	3.13 max	1.75 gpm	3.81 gpm
3000	0.37	0.53	1.03	2.01 max	2.34 max	3.74 max	4.34 gpm	na
5000	0.59	0.78	1.37	2.69 max	3.06 max	5.25 max	7.86 gpm	na

** Flow rates are measured using Stoddard solvent at 80° F with a 5 psi inlet pressure through a mated pair of fittings attached to the following hose lengths:
2000 series: 3 ft of -6 hose; 3000 series: 2 ft of -8 hose; 5000 series: 2 ft of -10 hose

	2000 Series Jiffy-tite™ Fittings				3000 Series Jiffy-tite™ Fittings				5000 Series Jiffy-tite™ Fittings			
	2000 Socket		2000 Plug		3000 Socket		3000 Plug		5000 Socket		5000 Plug	
	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price	Part No.	Price
3AN Female	JT21303	\$33.29	JT22303	\$20.49								
4AN Female	JT21304	\$34.99	JT22304	\$22.39								
6AN Female	JT21306	\$36.89	JT22306	\$23.59	JT31306	\$42.39	JT32306	\$27.49				
8AN Female					JT31308	\$44.59	JT32308	\$28.39				
10AN Female									JT51308	\$66.99	JT52308	\$48.49
12AN Female									JT51310	\$70.29	JT52310	\$52.19
									JT51312	\$73.79	JT52312	\$58.49
3AN Male	JT21403	\$28.89	JT22403	\$18.49								
4AN Male	JT21404	\$30.49	JT22404	\$19.49								
6AN Male	JT21406	\$31.99	JT22406	\$20.39	JT31406	\$36.89	JT32406	\$23.49				
6AN Male - Buna Seals					JT31406B	\$36.89	JT32406B	\$23.49				
8AN Male					JT31408	\$38.79	JT32408	\$24.59	JT51408	\$62.59	JT52408	\$45.29
8AN Male - Buna Seals					JT31408B	\$38.79	JT32408B	\$24.59	JT51408B	\$62.59	JT52408B	\$45.29
10AN Male									JT51410	\$65.59	JT52410	\$48.69
12AN Male									JT51412	\$68.99	JT52412	\$51.59
0.34" Hose Barb	JT21506	\$33.59	JT22506	\$20.49	JT31506	\$40.49	JT32506	\$26.49				
0.34" Hose Barb - Buna Seals					JT31506B	\$40.49	JT32506B	\$26.49				
0.44" Hose Barb					JT31508	\$42.33	JT32508	\$27.79	JT51508	\$66.29	JT52508	\$58.49
0.56" Hose Barb									JT51510	\$91.99	JT52510	\$61.59
-4 Straight Hose End	JT21604	\$37.59	JT22604	\$24.89								
-6 Straight Hose End	JT21606	\$39.49	JT22606	\$26.29	JT31606	\$45.29	JT32606	\$33.59				
-8 Straight Hose End					JT31608	\$47.59	JT32608	\$35.19				
-10 Straight Hose End									JT51610	\$72.19	JT52610	\$60.19
-12 Straight Hose End									JT51612	\$75.99	JT52612	\$63.39
-6 45° Hose End	JT21606D	\$45.19	JT22606D	\$31.89	JT31606D	\$51.69						
-12 45° Hose End									JT51612D	\$83.39	JT52612D	\$70.79
-6 90° Hose End	JT21606E	\$45.19	JT22606E	\$31.89	JT31606E	\$51.69	JT32606E	\$33.59				
-8 90° Hose End					JT31608E	\$53.99	JT32608E	\$41.59				
-12 90° Hose End									JT51612E	\$83.39		
Not Pictured	1/8 NPT Female	JT21702	\$34.79	JT22702	\$22.29							
	1/4 NPT Female	JT21704	\$36.59	JT22704	\$23.39	JT31704	\$40.29	JT32704	\$26.99			
	1/8 NPT Male	JT21802	\$33.29	JT22802	\$21.29							
	1/4 NPT Male	JT21804	\$35.29	JT22804	\$22.39	JT31804	\$39.39	JT32804	\$26.19			
	3/8 NPT Male				JT31806	\$41.29	JT32806	\$28.99	JT51806	\$60.79	JT52806	\$47.19
	1/2 NPT Male								JT51808	\$67.59	JT52808	\$50.59
Non-Valved	8AN Female - Non-Valved				JT31308A	\$38.49						
	1/4" Hose Barb - Non-Valved	JT21504A*	\$25.99	JT22504A*	\$15.49							

* If you have a pair of valved Quick-Connect fittings on the fuel line feeding your engine, you can use one of these non-valved fittings to take a fuel sample at impound. Just disconnect the fuel line and plug the appropriate non-valved fitting into the supply side fuel line fitting. Turn your fuel pump on for a few seconds and you'll have the sample.

Jiffy-tite™ Part Number Builder • Use this table to construct the Jiffy-tite™ part number you need

We have many more combinations in stock than we can possibly list here; please see our website or give us a call. If we don't have it, we can order it for you!

Digit 1	Digit 2	Digit 3		Digits 4 & 5	Letter (optional)	
2 = 2000 Series 3 = 3000 Series 5 = 5000 Series	1 = Socket 2 = Plug	1 = O-Ring Boss Adapter 3 = Female AN Adapter 4 = Male AN Adapter 5 = Hose Barb Adapter	6 = Reusable Hose End 7 = Female NPT Threads 8 = Male NPT Threads	AN Dash Size or NPT Size	A = Non-Valved B = Buna N (Nitrile) Seals C = Non-Valved, Buna N Seals D = 45° Elbow E = 90° Elbow	BD = 45° Elbow, Buna N Seals BE = 90° Elbow, Buna N Seals F = EPDM Seals M = Lanyard P = Push Lock Hose Barb